



Model: U 5.40


SPECIFICATIONS

Volume flow 50 Hz	40 m ³ /h
Vacuum absolute 50 Hz	1 mbar
Power 50 Hz	1.1 kW
Noise Level 50 Hz	67 dB(A)
Volume flow 60 Hz	48 m ³ /h
Vacuum absolute 60 Hz	1 mbar
Power 60 Hz	1.35 kW
Noise Level 60 Hz	71 dB(A)
Weight	27...28.5 kg with motor

a	b	c	d
≤192.1	83/82.7	156.5	157/190
e	f	g	h
120.8/87.8	79.2/112.2	35.7	222.7/203.7

* depending on motor version

Oil tank	k
1.0 l	430
0.5 l	309

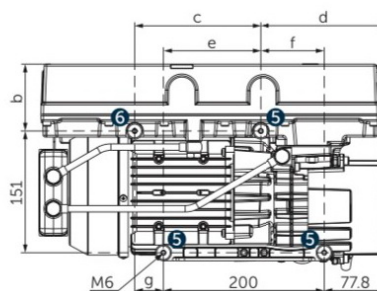

	U 5.40 XL K	U 5.40 XL	U 5.40
1 Vacuum connection (G1), rotatable in 90° steps	vertical (see drawing)	horizontal	horizontal
2 Exhaust air side	G ³ / ₄	open	open
3 Oil-air cooler	inclusive	-	-
4 Gas ballast valve	inclusive	optional	optional
5 Rubber buffers, 3 pieces	inclusive	inclusive	inclusive
6 Additional rubber buffer	inclusive	inclusive	-
7 Oil filler cap			
8 Oil sight glass			
9 Screw plug for oil drain			
L Overall device length L1 with motor is variable, see separate motor specification sheet			

