




Technical specifications

TECHNICAL DATA	R5 RA 0025 F	R5 RA 0040 F
Nominal pumping speed	25 m ³ /h	40 m ³ /h
Ultimate pressure (Gas-ballast valve closed)	0.1 ... 0.5 hPa (mbar)	0.1 ... 0.5 hPa (mbar)
Ultimate pressure (Gas-ballast valve open)	0.5 ... 1.5 hPa (mbar)	0.5 ... 1.5 hPa (mbar)
Nominal motor rating	1.0 kW	1.4 kW
Nominal motor speed	1500 min ⁻¹	1500 min ⁻¹
Power consumption at 100 mbar	0.8 kW	1.1 kW
Power consumption at ultimate pressure	0.5 kW	0.6 kW
Sound pressure level (ISO 2151), KpA = 3 dB	60 dB(A)	63 dB(A)
Oil capacity	1.0 l	1.0 l
Weight approx.	40 kg	45 kg
Dimensions (L x W x H)	585 x 284 x 263 mm	625 x 284 x 263 mm
Gas inlet	G 1¼"	G 1¼"
Gas outlet	G 1¼"	G 1¼"

Dimensional drawing

R5 RA 0025/0040 F

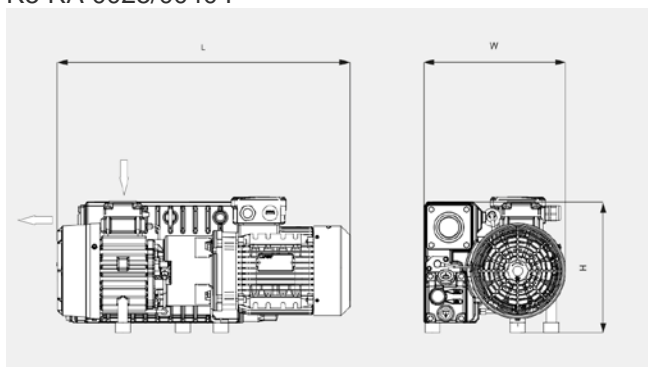

Pumping speed

Air at 20 °C. Tolerance: ± 10%

